

Further unique features:

- The Skimmer pumps are always fed with only unskimmed aquarium water. With the TC models untreated water is fed to the skimmer pumps under pressure (**patented**).
- Reprocessing of previously skimmed water and mixing with dirty water through the skimmer is not possible, further adding to the unparalleled skimming efficiency and low energy cost.

Deltec cleaning systems CS available for all skimmers starting at the TC/SC 1655 model. The foam tube of the skimmer cup is cleaned by rotating silicon wiper blades every 4 hours.

Alternatively, by utilising a timer, cleaning intervals can be automated and the cup emptied through a siphon system.



state-of-the-art technology for the future

Overview

TC series

Technical Data	Aquarium size litre	Water flow rate litre/h		Power consumption Watt		Airflow litre/h		
		normal	high	min.	max.	min.	max.	
TC 1655	1200	1000	1500	12	800			
TC 2060	1700	1400	2500	19	22	1100	1300	
TC 2560	2400	2000	2400	29	34	1500	1700	
TC 3070	4800	4000	2200	3600	58	68	3000	3200
TC 3070S	6000	5000	2200	4000	64	74	3400	4000
TC 4080	10000	8000	8000	9000	99	111	5100	5700
TC 4580	14000	11000	10000	12000	132	148	6800	7600

SC series


Technical Data	Aquarium size litre	Water flow rate litre/h		Power consumption Watt		Airflow litre/h		
		normal	high	min.	max.	min.	max.	
SC 2060	1700	1400	180	260	25	28	1100	1200
SC 2560	2400	2000	180	260	29	31	1500	1600
SC 3070	4800	4000	180	260	58	62	3000	3200
SC 3070S	6000	5000	180	260	70	76	3200	3500
SC 4080	9000	7500	220	290	117	156	5100	6800
SC 4580	10000	13000	220	290	156	156	6800	6800

Deltec – Innovators of excellence



Deltec GmbH
Steller Straße 75 · D-27755 Delmenhorst
www.deltec-aquaristic.de

state-of-the-art technology for the future

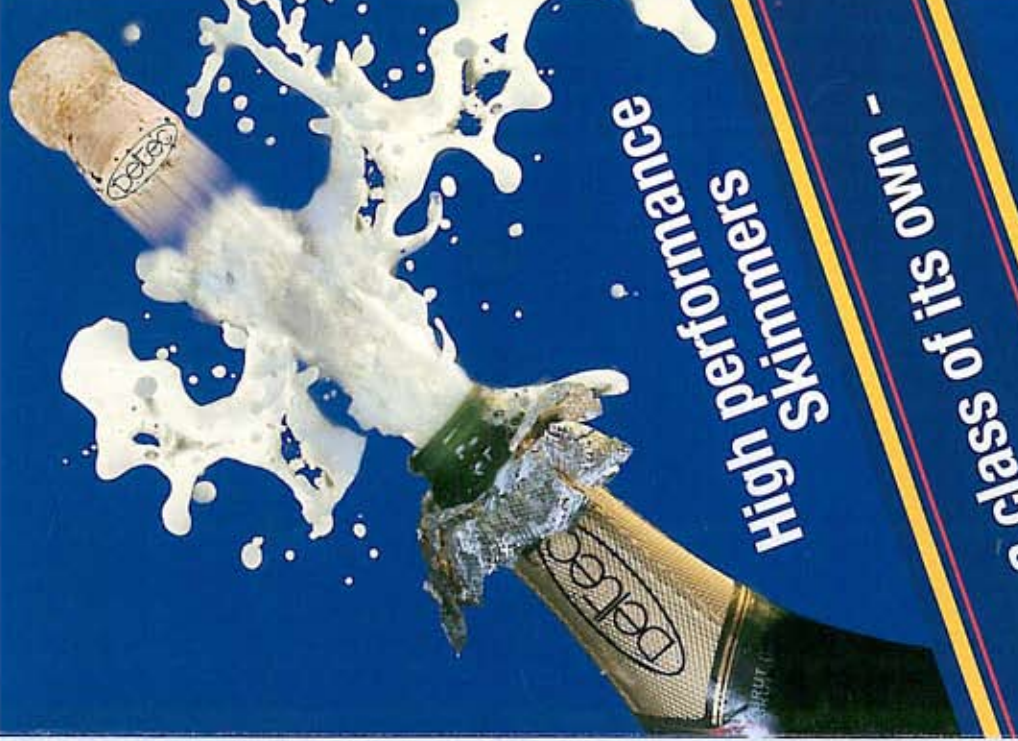

High performance Skimmers

- a class of its own -

High tech, you would not expect anything less from Deltec, quiet, efficient, energy saving



Innovators of excellence



patented

TC 2560

TC 3070

TC 2060

SC 2560

SC 3070

SC 2060



Delttec TC Skimmer

The Delttec TC Protein skimmer features the patented twin chamber system. This combines a very high air volume, minimal energy consumption, and high water flow through the skimmer. A separate water supply is required to operate the skimmer.

TC skimmers are designed to be positioned outside of the filter sump. It is however also possible to install the TC range of skimmers inside the filter sump.

Delttec SC Skimmer

The SC series skimmers are designed for in sump operation only. They feature high skimming performance, compact design and energy efficient operation.

water level adjuster



silencer



skimmer cup



The specially developed **Delttec DCS skimmer pumps** are extremely energy efficient. DCS pumps produce between **46 to 66 litre of air an hour for every Watt of power consumption.**



The **very fine bubbles** produced by the pumps enhance the skimming performance.

Delttec Skimmers of the TC and SC series are **quiet in operation** and due to their efficiency and low energy consumption hardly transfer any heat to the aquarium water.

Delttec DCS pump

